

LDPRO LED Bay Light

LUXAR
Lighting for Life

LUXAR
Lighting for Life

DESCRIPTIONS


100W 15000lm	150W 22500lm	200W 30000lm	240W 36000lm	320W 48000lm
------------------------	------------------------	------------------------	------------------------	------------------------



The lamp body is made of high-purity aluminum, integrated die-casting, large heat dissipation area, good thermal conductivity, high temperature resistance, corrosion resistance, suitable for a variety of harsh working environments.

Ordering Model	Watt	Input	Lumem	CRI	PF	Beam Angle
HRUFO-100W-X-XX-XXX-XXXXX	100W	AC120-277V	15000lm	80	>0.9	90/110°
HRUFO-150W-X-XX-XXX-XXXXX	150W	AC120-277V	22500lm	80	>0.9	90/110°
HRUFO-200W-X-XX-XXX-XXXXX	200W	AC120-277V	30000lm	80	>0.9	90/110°
HRUFO-240W-X-XX-XXX-XXXXX	240W	AC120-277V	36000lm	80	>0.9	90/110°
HRUFO-320W-X-XX-XXX-XXXXX	320W	AC120-277V	45000lm	80	>0.9	90/110°

DIMENSIONS

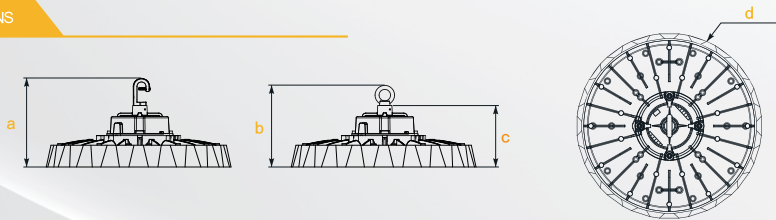


Ordering Model	Light			
	Height (a)	Height (b)	Height (c)	Outer Dia. (d)
HRUFO-100W-X-XX-XXX-XXXXX	200mm	160mm	120mm	∅ 260mm
HRUFO-150W-X-XX-XXX-XXXXX	205mm	165mm	120mm	∅ 260mm
HRUFO-200W-X-XX-XXX-XXXXX	205mm	165mm	125mm	∅ 300mm
HRUFO-240W-X-XX-XXX-XXXXX	215mm	175mm	135mm	∅ 325.7mm
HRUFO-320W-X-XX-XXX-XXXXX	215mm	175mm	135mm	∅ 350.7mm


INSTALLATION

1. Rings type:


1. Tighten the ring clockwise



2. Tighten the screw




3. Hang the light




2. Hook type:


1. Tighten the hook clockwise




2. Tighten the screw



3. Hang the light



4. Tighten the screw



Optional Accessories

