

Slim/USB-C Under Cabinet

36V Color Changeable with Hand-waving Sensor Free Connection and Pir sensor controller free connection



Model No.	Dimension L*W*H	Wattage	CCT	CRI	Lumens (lm)	Efficacy (lm)	Color
LGUL-A01-06-W-CCT	6*1.77*0.37in	1.8W	2700K/3000K/3500K/4100K	>Ra90	130lm	72	White
LGUL-A01-10-W-CCT	10*1.77*0.37in	3W	2700K/3000K/3500K/4100K	>Ra90	250lm	83	White
LGUL-A01-21-W-CCT	21*1.77*0.37in	7W	2700K/3000K/3500K/4100K	>Ra90	600lm	86	White
LGUL-A01-30-W-CCT	30*1.77*0.37in	10W	2700K/3000K/3500K/4100K	>Ra90	800lm	80	White
LGUL-A01-48-W-CCT	48*1.77*0.37in	14.4 W	2700K/3000K/3500K/4100K	>Ra90	1150lm	80	White
LGUL-A01-60-W-CCT	60*1.77*0.37in	18 W	2700K/3000K/3500K/4100K	>Ra90	1450lm	81	White

Features

- Aluminum housing
- Gesture Control
- PIR Sensor
- USB-C Direct Connect
- High CRI Interconnectable Dimming
- Plug compatibility
- Press switch of color select and dimming

Application



Certificates



Slim/USB-C Under Cabinet

36V Adapter and Control & Connection Box



Product Name	Dimension L*W*H	Color
Cable connector	6"/ 12"/24"/ 36"/72 "	White
Direct connector	1.09*0.42*0.23in	White
Plug cable	36in	White
Jbox 48W driver 120-277Vinput / 36V output	5*5*0.95in	White
PIR sensor controller	3.07*1.77*0.79in	White
Gesture controller	3.07*1.77*0.5in	White
Plug 48W driver	4.88*2.8*1.66in	White
Plug 24W driver	3.82*2.44*1.7in	White


Features

- Aluminum housing
- Gesture Control
- PIR Sensor
- USB-C Direct Connect
- High CRI Interconnectable Dimming
- Plug compatibility
- Press switch of color select and dimming

Application




Certificates

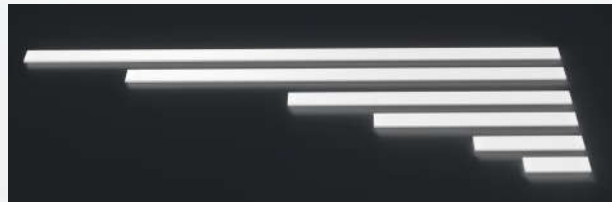

Cable connector



Direct connector

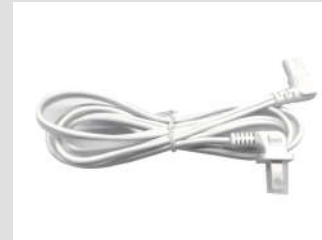


Plug cable

Slim/USB-C Under Cabinet


36V Adapter and Control & Connection Box




Jbox 48W driver
120-277V input /
36V output

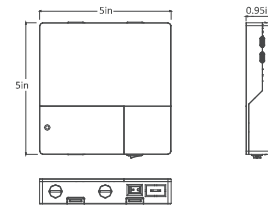



PIR sensor controller

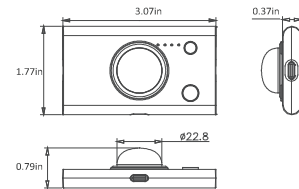


Gesture controller

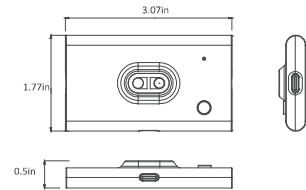

Plug 48W driver

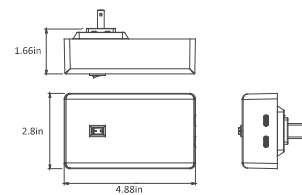

Plug 24W driver

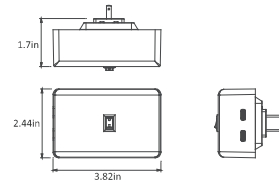

Slim/USB-C Under Cabinet


36V Adapter and Control & Connection Box



Installing

Clip Mounting

3M tape Mounting

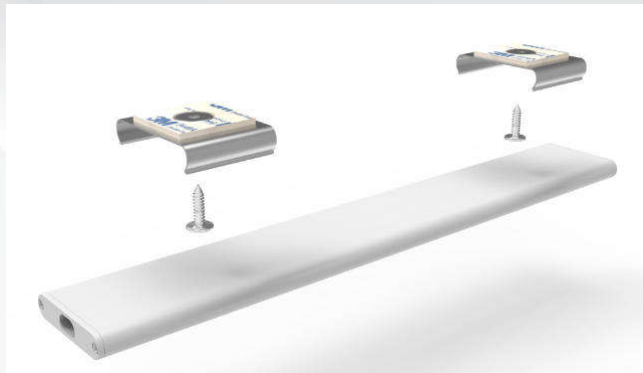

Max Run

UC Slim System Max Run
(when mixed-use make sure total power $\leq 48W$)

Item	Driver output power(w)	unit power(w)	max connect units(pcs)
6" Fixture	48	1.8	26
10" Fixture	48	3	16
21" Fixture	48	7	6
30" Fixture	48	10	4
48" Fixture	48	14.4	3
60" Fixture	48	18	2
PIR sensor		0.25	
Gesture sensor		0.25	